


Installation Instructions for Passive Restraint Graco® - Quattro™ Strollers

October, 2010

Dear Valued Customer:

The enclosed fabric passive restraint is being provided to you as an added measure of safety while using your Graco® stroller. You must continue to use the harness on your stroller after installing the passive restraint. This restraint is intended for use on the Quattro™ strollers that were manufactured prior to November 1, 2006. Please carefully follow these instructions when installing the passive restraint.

Passive Restraint Features:

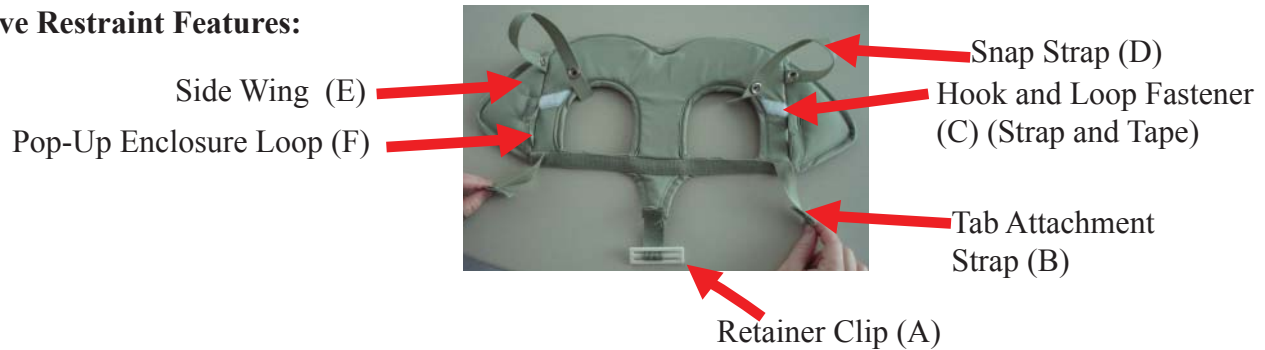

1. Models without adjustable legrest:

With tray in fully opened position, lift the end of the seat pad up to expose the plastic tabs. Remove the fabric flap from the plastic tabs as shown.



Models with adjustable legrest:

Lift legrest up and unfasten the hook and loop straps as shown. Push webbing strap through slot in legrest.



Webbing →



Hook and Loop Straps


2. Place the passive restraint with the tab attachment straps (B) and snap straps (D) facing away from the seating area as shown.



3. Insert retainer clip (A) from the passive restraint through the slot in the seat pad. MAKE SURE to insert the retainer clip in front of the existing crotch strap as shown.




4. Lift the seat pad to expose the seat base. Insert the retainer clip through the top of the seat base as shown. Pull retainer clip completely through to the underside of the seat base.

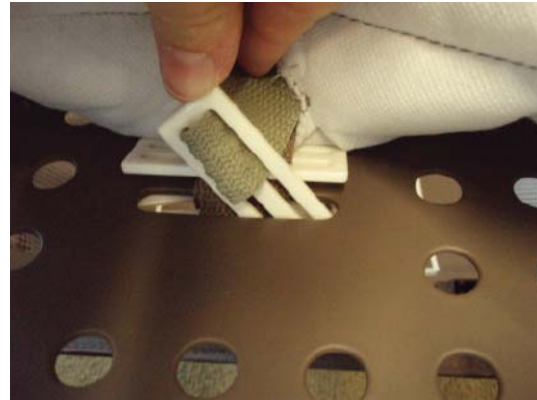

5. Pull up on the passive restraint to make sure the retainer clip lays flat on the underside of the stroller seat as shown in Step 6.



6. Retainer clips should appear as shown flat against bottom of seat base.

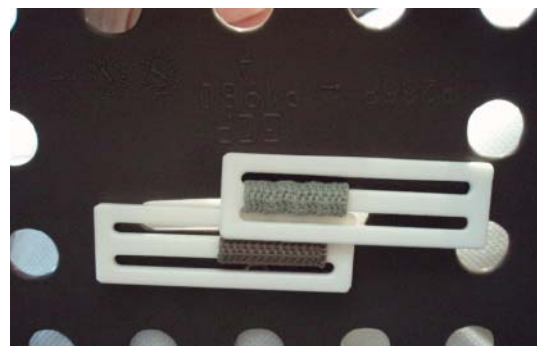

7. On models **without** adjustable legrest, re-attach fabric flap to the plastic tabs as shown.



On models **with** adjustable legrest, pull the webbing through the slot in footrest to attach the seatpad back onto the footrest.



Webbing

8. Grasp the tab attachment strap (B) on the passive restraint and position exactly as shown.



(B)

9. Insert the tab attachment strap through the slot in the plastic tab as shown and pull through. Make sure the strap is securely attached by pulling up on it. Repeat Steps 8-9 on other side of restraint. Lower the end of the seat pad back into position.



10. Insert the side wing (E) of the passive restraint in between the side panel of the seat pad and the metal frame as shown.



(E)

11. Insert the strap of the hook and loop fastener (C), located on the inside of the passive restraint, through the slot in the side panel of the seat pad as shown.



(C) Strap
(located
on the inside
of passive
restraint)

12. Continue by inserting the strap through the slot in the passive restraint as shown and pull through to the front of the restraint.



13. Pull strap tightly and fasten evenly to the tape on the front of the restraint as shown. Repeat Steps 10-13 on other side of restraint.



14. Position and wrap the snap strap (D) around the metal frame of the stroller exactly as shown.



15. Fasten the snap strap. Repeat Steps 14 and 15 on other side of restraint.



16. Re-latch the child tray and make sure that the top of the passive restraint is tucked under the tray as shown.



17. Correct assembly of passive restraint.

WARNING : Never remove the passive restraint except for cleaning. Failure to use this restraint may result in entrapment and strangulation.



On models without the adjustable legrest, when using pop-up enclosure with the passive restraint, follow Steps 18 thru 21 of these instructions.




(G)
Plastic
hooks

Follow these directions:

18. Open tray and unfasten the hook and loop straps underneath bottom edge of seat pad as shown.



19. Insert strap through pop-up enclosure loop (F) on side of the restraint as shown. Repeat on other side of restraint.

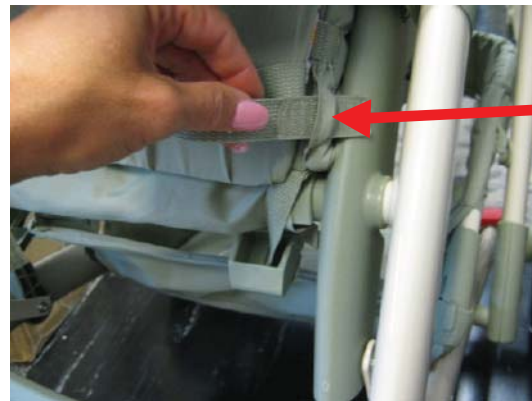

(F)

20. Pull both straps and refasten the ends together as shown.



21. Re-latch the tray making sure the passive restraint and pop-up enclosure are located on the inside surface of the tray as shown. Attach the plastic hooks (G) on the back of the seat pad to the bottom inside edge of the tray.



WARNING : NEVER use the passive restraint as a substitute for the pop-up enclosure. Always refer to stroller owners manual for proper use and warnings of pop-up enclosure.

On models with the adjustable legrest, when using pop-up enclosure with the passive restraint, follow Steps 22 thru 25 of these instructions.

Follow these directions:

22. Open tray and lift legrest up. Unfasten the hook and loop straps underneath legrest as shown.



Hook and Loop Straps

23. Thread straps through button holes on each side of passive restraint as shown.




24. Slide straps underneath slots in leg rest and fasten straps together. Re-latch the tray.



Hook and Loop Straps

25. To lock off enclosure, slide wire down as shown.

WARNING : NEVER use the passive restraint as a substitute for the pop-up enclosure. Always refer to stroller owners manual for proper use and warnings of pop-up enclosure.

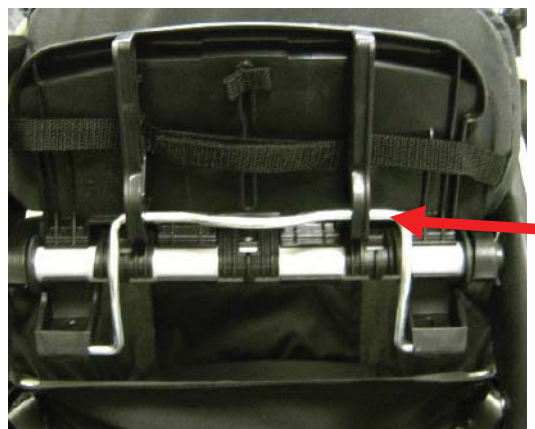

To lock legrest into place, wire should snap down into this position.

If you have any questions or concerns regarding the installation of this passive restraint, please contact Graco Customer Service at 1-800-345-4109 between the hours of 8am and 5pm ET Monday – Friday.

For additional information and a video demonstration on the proper installation of this passive restraint, please visit www.gracobaby.com

Thank you for installing this added safety feature to your stroller.

Sincerely,

Graco Children's Products Inc.

